


LEUCO S.p.A. – VIA P.COLLETTA, 20 – VILLAGGIO CROSTOLO - 42124 REGGIO EMILIA – ITALY E.C. VAT registration number: IT 00607420353 - Tax ID code and inscription number in the Companies Register of RE: 00607420353 TEL: +39/0522/923011 – FAX: +39/0522/923030 - 923040 E-mail: <u>info@hawkpumps.com</u> – http:// <u>www.hawkpumps.com</u> Company subject to the management and coordination of Kärcher Beteiligungs GmbH



- Nozzle connector strip
- Manifold with 5 fog nozzles for manual nebulisation at 10

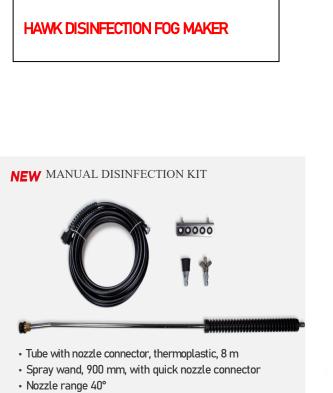

The HAWK Disinfection Fog Maker is a high-pressure nebuliser on a trolley.

Complete with a fan and corona nozzles, it is fitted with a pumping module with a capacity of 1l/min - 60 bar, a 30-litre tank and an electric control panel with an ON-OFF switch.

The range of the fan can reach up to 7 metres.

It is the ideal machine for disinfecting both outdoor and indoor areas, but can also be used for reducing particulate matter (PM10) in small/medium-sized areas.

It is practical and mobile and has a battery life of 30 minutes.



LEUCO S.p.A. – VIA P.COLLETTA, 20 – VILLAGGIO CROSTOLO - 42124 REGGIO EMILIA – ITALY E.C. VAT registration number: IT 00607420353 - Tax ID code and inscription number in the Companies Register of RE: 00607420353 TEL: +39/0522/923011 – FAX: +39/0522/923030 - 923040 E-mail: <u>info@hawkpumps.com</u> – http:// <u>www.hawkpumps.com</u> Company subject to the management and coordination of Kärcher Beteiligungs GmbH

TECHNICAL CHARACTERISTICS



Technical data									
Code	Model	Pressure	Capacity	Droplet size	Output	Dimensions (LxDxH) mm	Weight		
1.904-823.0	HAWK DISINFECTION FOG MAKER	60bar	l/min	10mcr	550W (220V-50Hz)	800 x 650 x 1200	55kg		

General technical characteristics	Technical characteristics, fan	Technical characteristics, pump
Frame: coated steel Tank 301 Protection level: IP54 Dimensions (LxDxH) 800x650x1200mm	No of nozzles: 1 crown with 11 nozzles Maximum area of coverage: 150 m ² Motor power: 2.2Kw 2800g/min Range: 21m (in wind-free conditions) Elevation: 0° +40° Fan diameter: 410mm Noise level: < 87Lwa	Professional pump 1450 g/ min, rod movement, brass head, 3 ceramic pistons Operating pressure: 60 bar Integrated by-pass valve